

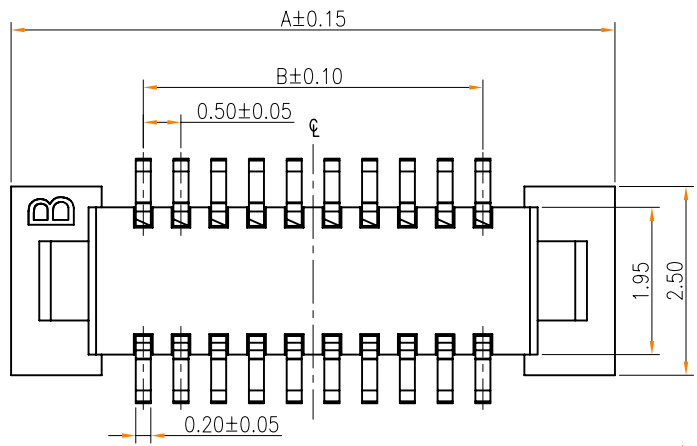


MATING HEIGHT

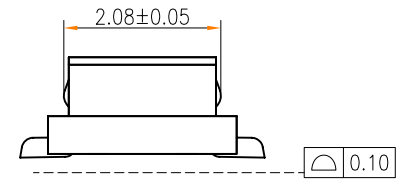

3D VIEW

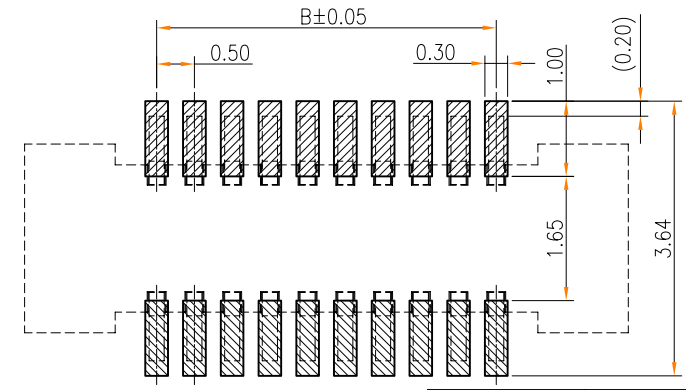

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

NOTES:

- HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- CODING INFORMATION:5001-BTB 0515-**-MR

PACKING : R: REEL
MALE
PIN
MATING HEIGHT : 15-1.5H
0.5BTB
JM CONN BTB CONNECTOR SERIES

HIGH	MALE	FEMALE H1	FEMALE H2
1.50	1.3	0.9	1.35
2.00	1.3	1.4	1.85
2.50	1.3	1.9	2.35

NO.of contacts	Dimensions			
	A.	B.	C.	D.
10	5.50	2.00	3.45	4.96
12	6.00	2.50	3.95	5.46
16	7.00	3.50	4.95	6.46
18	7.50	4.00	5.45	6.96
20	8.00	4.50	5.95	7.46
14	6.50	3.00	4.45	5.96
16	7.00	3.50	4.95	6.46
18	7.50	4.00	5.45	6.96
20	8.00	4.50	5.95	7.46
22	8.50	5.00	6.45	7.96
24	9.00	5.50	6.95	8.46
26	9.50	6.00	7.45	8.96
28	10.00	6.50	7.95	9.46
30	10.50	7.00	8.45	9.96
32	11.00	7.50	8.95	10.46
36	12.00	8.50	9.95	11.46
40	13.00	9.50	10.95	12.46
50	15.50	12.00	13.45	14.96
100	28.00	24.50	25.95	27.46

新增CAP规格	Kavin	02/17/17
产品料号修正	Kavin	12/01/16
修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE
		日期 DATE

RoHS
Compliant
2013/95/EC



CUSTOMER		深圳市文章济美科技有限公司			
一般公差 GENERAL TOLERANCE	制图 (DR): Kavin 2016.07.05	品名 (TITLE):	0.5mm 单槽BTB MALE		
.X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	审核 (CHKD):	料号 (PART NO):	5001-BTB0515-**-MR		
版本 (REV) B	比例 (SCALE): 1:8	单位 (UNITS): mm	张数 (SHEET): 1 OF 1	图幅 (SIZE): A4	
	核准 (APPD):				


NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
3.CODING INFORMATION:5001-BTB 0515- ** F R

PACKING: R: REEL
FEMALE
PIN
MATING HEIGHT: 15-1.5H;
20-2.0H;
25-2.5H.
JM CONN BTB CONNECTOR SERIES


HIGH	MALE	FEMALE H1	FEMALE H2
1.50	1.3	0.9	1.35
2.00	1.3	1.4	1.85
2.50	1.3	1.9	2.35

NO.of contacts	Dimensions			
	A.	B.	C.	D.
10	5.60	2.00	3.50	3.90
12	6.10	2.50	4.00	4.40
16	7.10	3.50	5.00	5.40
18	7.60	4.00	5.50	5.90
20	8.10	4.50	6.00	6.40
14	6.60	3.00	4.50	4.90
16	7.10	3.50	5.00	5.40
18	7.60	4.00	5.50	5.90
20	8.10	4.50	6.00	6.40
22	8.60	5.00	6.50	6.90
24	9.10	5.50	7.00	7.40
26	9.60	6.00	7.50	7.90
28	10.10	6.50	8.00	8.40
30	10.60	7.00	8.50	8.90
32	11.10	7.50	9.00	9.40
36	12.10	8.50	10.00	10.40
40	13.10	9.50	11.00	11.40
50	15.60	12.00	13.50	13.90
100	28.10	24.50	26.00	26.40







3D VIEW

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

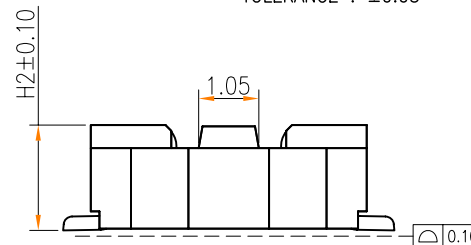

MATING HEIGHT

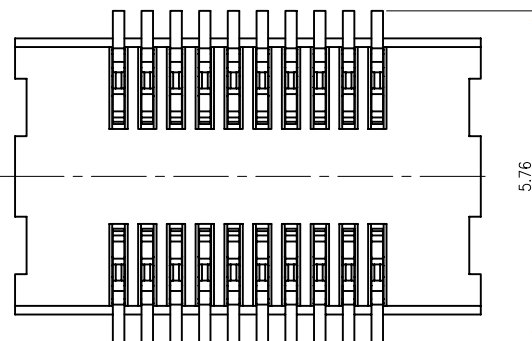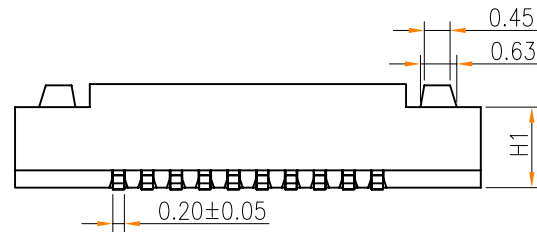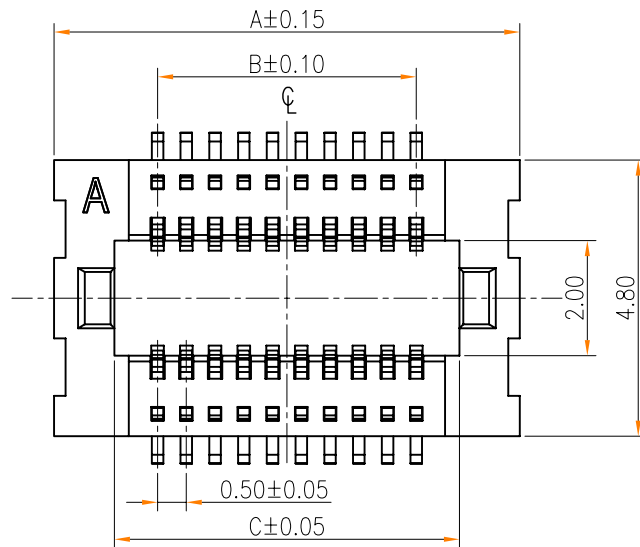

新增CAP规格	Kavin	02/17/17
产品料号修正	Kavin	12/01/16
修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE

RoHS
Compliant
2013/95/EC



CUSTOMER 深圳市文章济美科技有限公司	
一般公差 GENERAL TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	制图 (DR): Kavin 2016.07.05
品名 (TITLE): 0.5mm 单槽BTB FEMALE	料号 (PART NO): 5001-BTB0515**FR
版本 (REV) B	比例 (SCALE) 1:8
单位 (UNITS) mm	张数 (SHEET) 1 OF 1
图幅 (SIZE) A4	核准 (APPD):