







PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11/20/17"

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 30 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;



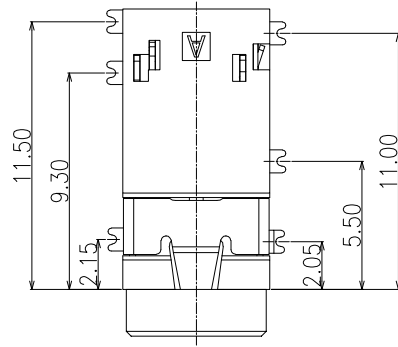


3D VIEW

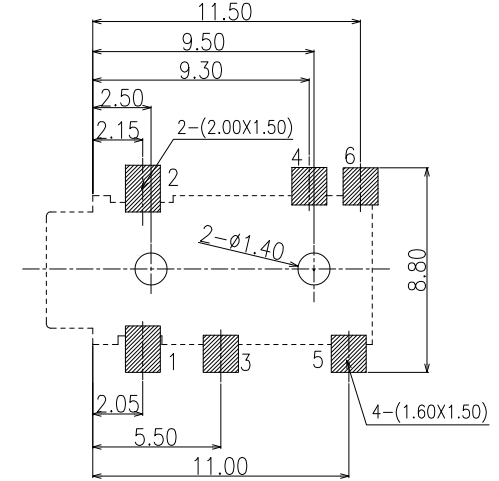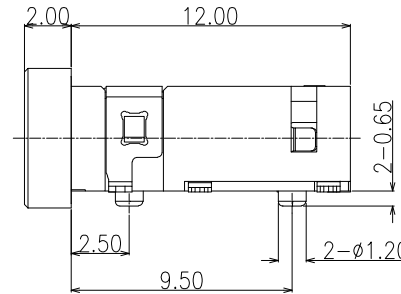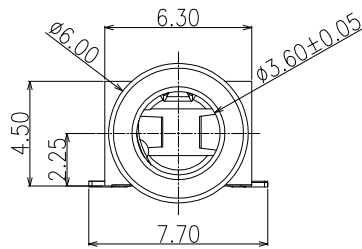

P.C.B LAYOUT

TOP VIEW

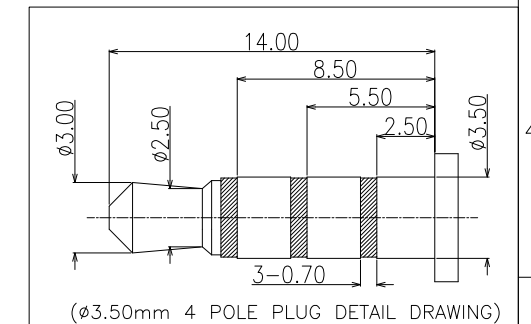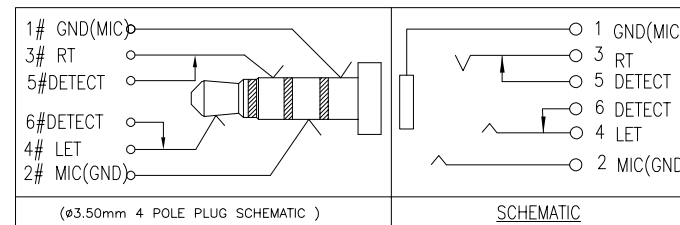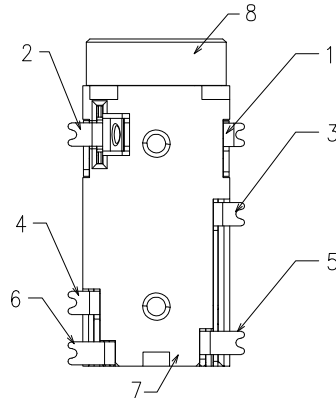

8	SLEEVE	1	COPPER ALLOY;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
7	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
6	TERMINAL 6#	1		T=0.25mm
5	TERMINAL 5#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL,GOLD PLATING ON SOLDER AREA ;	T=0.25mm
4	TERMINAL 4#	1		T=0.25mm
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1		T=0.25mm
1	TERMINAL 1#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.25mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	

东莞市文章济美电子有限公司

DWG NO.		PART NAME:	ø3.5mm PHONE JACK H=4.5 mm
DESIGN:	Lucky	SMT TYPE CONNECTOR	
CHECK:		PART NO.	PJ35A051-F06G1BR-0
APPROVED	Lucky	REV. A	UNIT: mm
		SHEET:	1/1