





REV.	ECN.NO.	MODIFY/CONTENT	DATE
A0		NEW	2017/10/08

NOTES:


- 1) MATERIAL:  
HOUSING: HIGHT-TEMP. PLASIC UL 94V-0  
CONTACT: COPPER ALLOY, T=0.15  
SHELL: STAINLESS STEEL, T=0.15
- 2) FINISH :  
CONTACT: Au 1u" PLATED ON CONTACT AREA;  
Au 1u" PLATING ON SOLDER TAILS,  
SHELL: NICKEL PLATED OVERALL,  
Au 1u" PLATING ON SOLDER TAILS,
- 3) 料号说明: 5001 - TF 0150 D - 09 R 1-00  
TF卡座  
H=1.50  
简易式

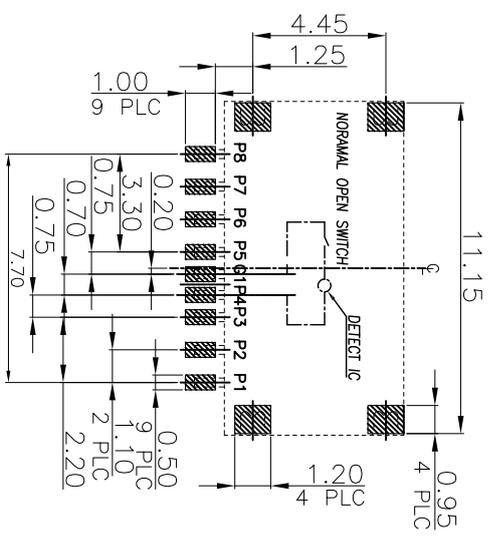

RECOMMENDED PCB LAYOUT  
TOL:(±0.05)

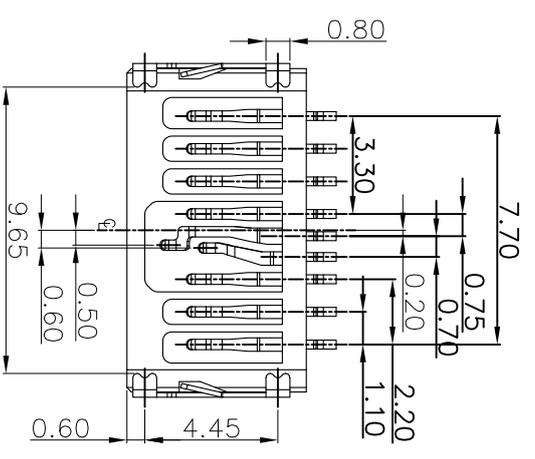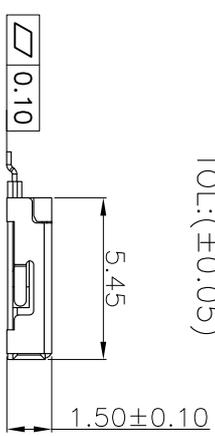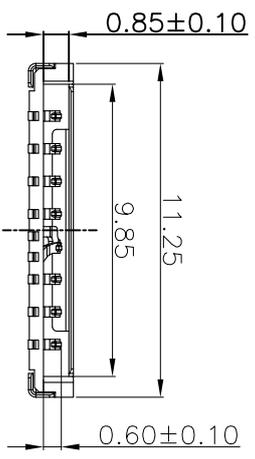

P8	DAT1
P7	DAT0
P6	VSS
P5	CLK
G1	SWITCH
P4	VDD
P3	CMD
P2	CD/DAT3
P1	DAT2
PIN NUMBER	PIN NUMBER

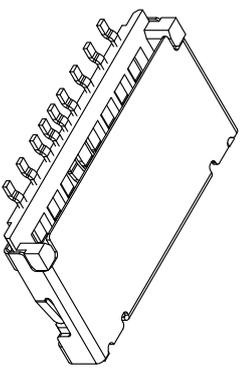

GENERAL TOLERANCE		DWG NO.	APPD:	Scale
X:±0.45	X:±5'			1:1
X±0.35	X'±2'	Title	CHKD:	UNIT
.XX±0.25	.XX'±1'	Part NO.	DR:	mm
.XXX±0.15	.xxx'±0.5'		Date	

T-FLASH CONN 1.5H  
(SIMPLE SWITCH TYPE)  
5001-TF0150D-09R1-00  
Date: 2017/10/08  
彭善平

东莞市文章济美电子有限公司