

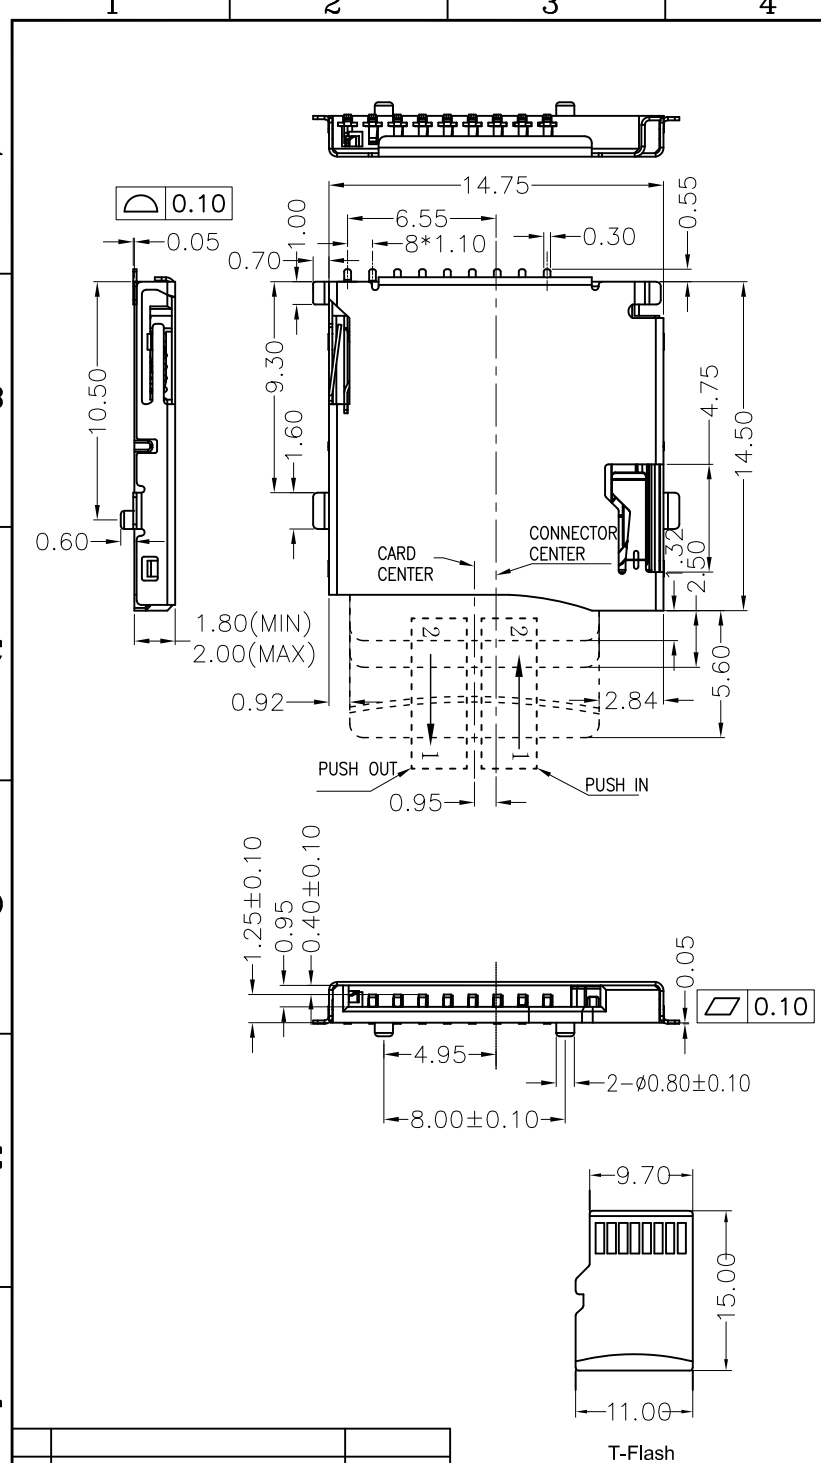


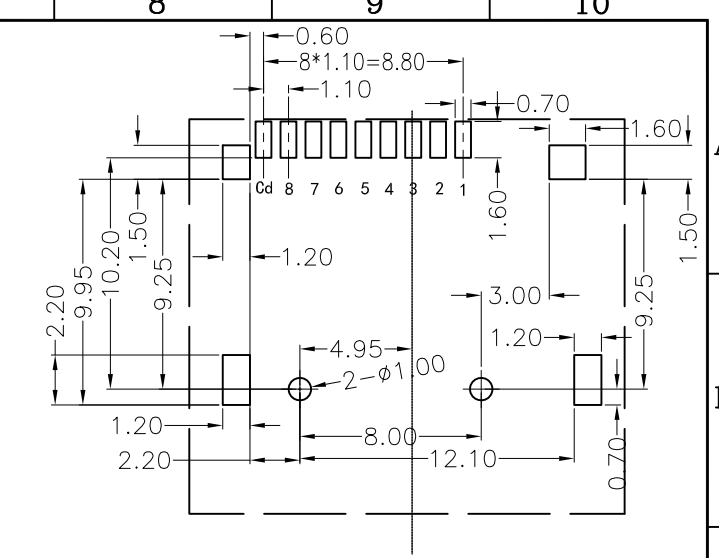

A	初版发行	2017/07/07
REV	DESCRIPTION	DATE

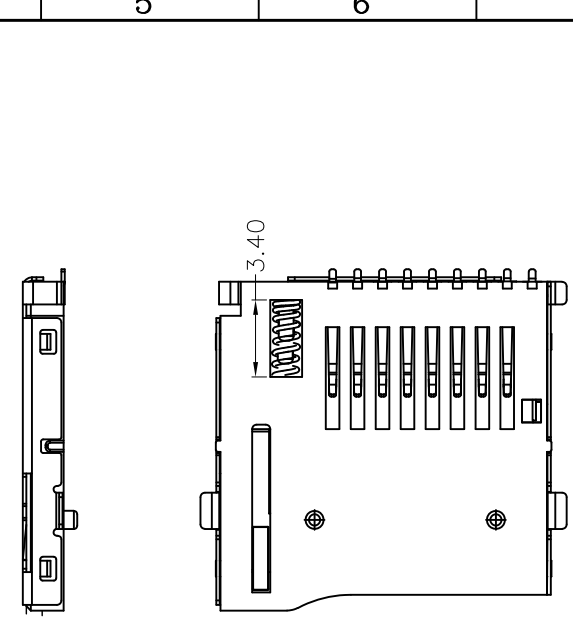

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE:+/-0.05)

- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V-0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
Shell: Stainless steel.
 - 2.Plating
2.1.Terminal:Contact area:0.5u" gold plate
over 50u" NI min.Solder area:100u"
pure TIN plate over 50u" NI min.
2.2.Shell: Ni:50u"min.
 - 3.MULTIMEDIA CARD COMPATIBLE

料号说明: 5001 - TF 0180 B - 09 R 1-00
TF卡座
H=1.80
自弹式
ALTERNATE
PACKING:R(卷)
PIN

IN NO.	NAME	YTP	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

深圳市文章济美科技有限公司

X. ± 0.30 .X ± 0.25 .XX ± 0.20 .XXX± X° ± 1° .X° ± 0.5°	APPD: CHKD: DR:	TITLE: TF外焊 PUSH	JMECONN
UNITS: mm SCALE: 1:1	PART NO: 5001-TF0180B-09R1-00	DWG NO:	

