
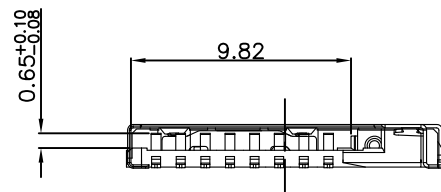



Customer drawings
Reference only

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A0		NEW	2017/09/28

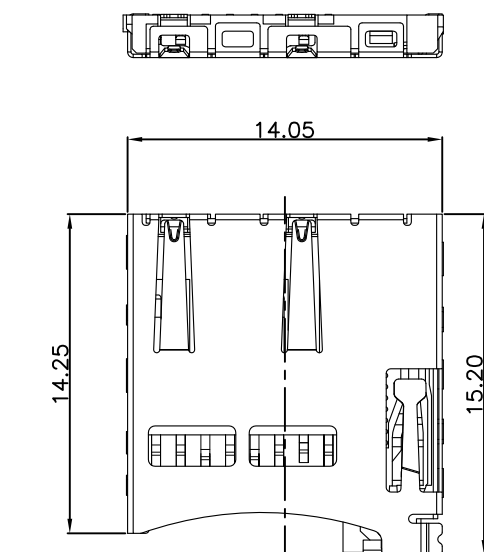


Pin No.	MICRO SD
PIN1	DAT2 1P
PIN2	CD/DAT3 2P
PIN3	CMD 3P
PIN4	VDD 4P
PIN5	CLK 5P
PIN6	VSS 6P
PIN7	DAT0 7P
PIN8	DAT1 8P
PIN9	CARD DETECT
PIN10	




CIRCUIT:



WITHOUT CARD



CARD INSERTED

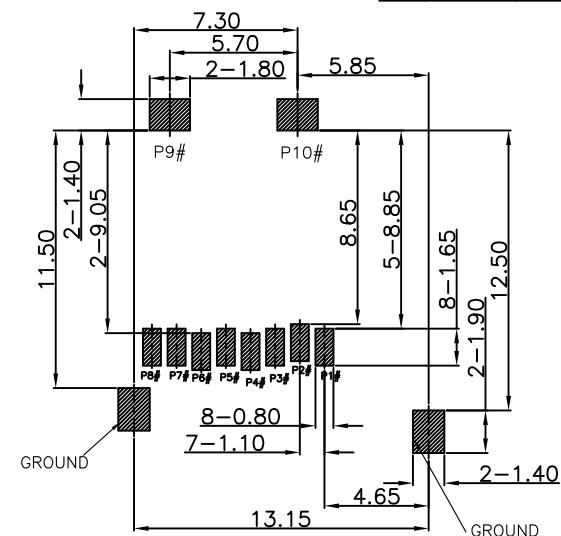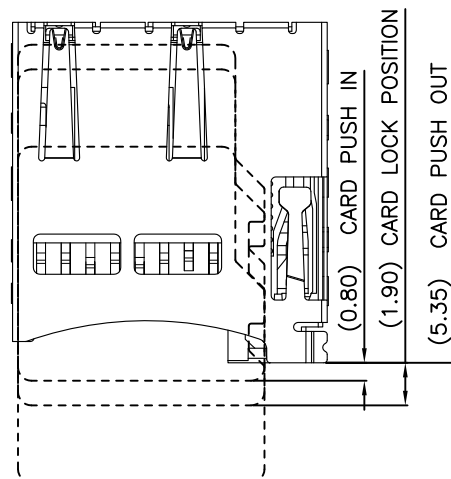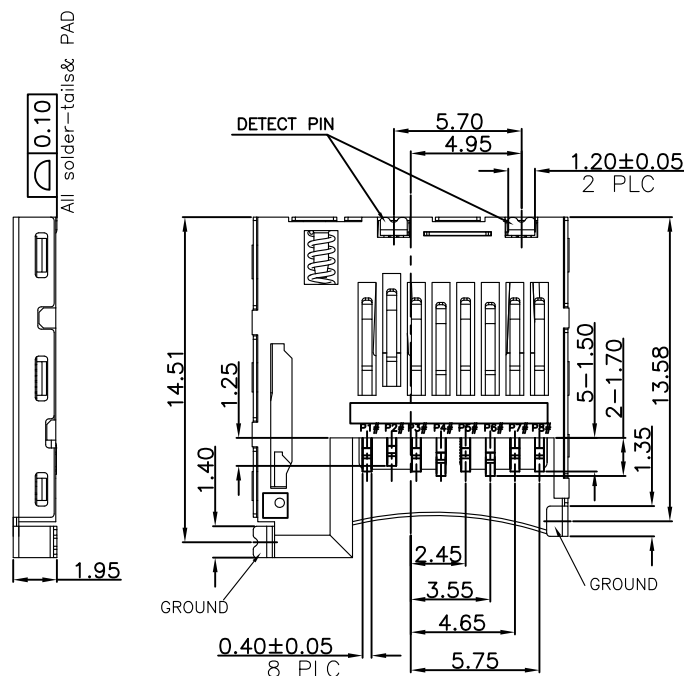

RECOMMENDED PCB LAYOUT
(ALL TOLERANCE ARE ±0.05)

NOTES:

1) MATERIAL:

HOUSING : LCP S475, COLOR:BLACK UL 94-V0
CONTACT : COPPER ALLOY,T=0.15mm
SHELL : STAINLESS STEEL,T=0.15mm

2) FINISH :

CONTACT:GOLD FLASH PLATED ON CONTACT AREA;
GOLD FLASH PLATED ON SOLDER TAILS,
SHELL: GOLD FLASH PLATED ON SOLDER TAILS

3) PART NO.: C-D3 08 195 A1-1

C: CARD TYPE
D3: MICRO SD CARD
08: 8Pin
195: 1.95 HEIGHT
A1: SERIAL NUMBER
1: GOLD PLATED G/F

GENERAL TOLERANCE			DWG NO.		APPD:		Scale	1:1
X.±0.45		x.*±5°	Title	MICRO SD PUSH CONN 内焊 常闭型	CHKD:		UNIT	mm
.X±0.35		.x*±2°			DR:	彭善平		
.XX±0.25		.xx*±1°	Part NO.	C-D308195A1-1	Date	2017/9/28		
.XXX±0.15		.xxx*±0.5°		东莞市文章济美电子有限公司				
SHEET	1/1							