
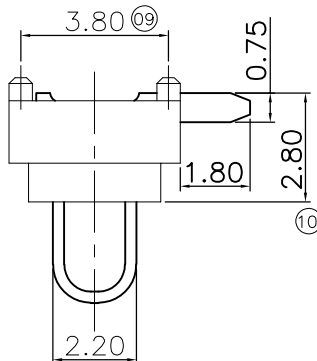
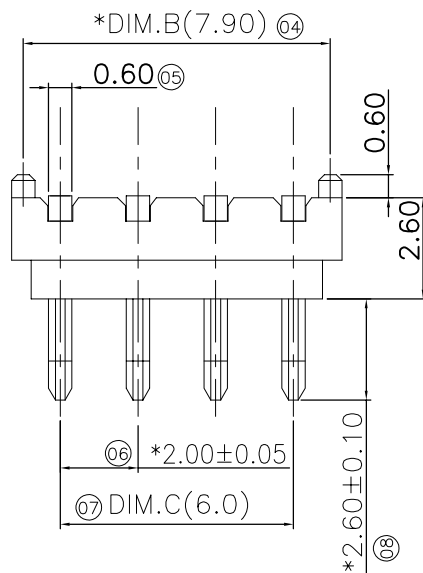
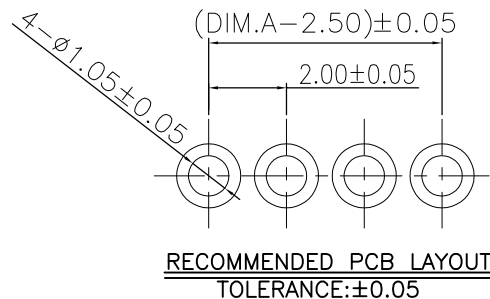


RoHS
Compliant

结构图面

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	新增图档				1801018

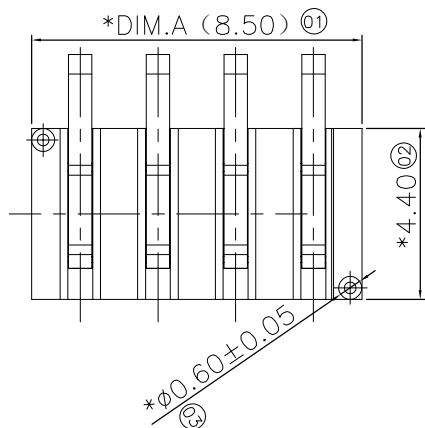

备注:

1. 材料: LCP黑色, 黄铜镀金;
1. 额定电压: AC/DC 30V Max
2. 绝缘耐压: AC 1000V 1 MINUTE, 无损伤
3. 绝缘电阻: DC 500V 1 MINUTE, 1000MΩ Min
4. 操作温度: -20° to +80°
5. Current rating: 5A
6. instant CURRENT: 7A

Table

PIN	Dim. A	Dim. B	Dim. C
02pin	4.50	3.90	2.00
03pin	6.50	5.90	4.00
04pin	8.50	7.90	6.00
05pin	10.50	9.90	8.00
06pin	12.50	11.90	10.00
07pin	14.50	13.90	12.00
08pin	16.50	15.90	14.00
09pin	18.50	17.90	16.00
10pin	20.50	19.90	18.00

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)				SCALE: 1:1		NUMBER:		深圳市文章济美科技有限公司				
▽ 0			MM			INCH	MATERIAL:		HRC:		TITLE: MINI 2.0PH 90度DIP 2.6H 公座			
	.X	±0.25	.X	ⓐ		DRAWN BY		DATE						
	.XX	±0.15	.XX	ⓑ		CHECKED BY		DATE						
	.XXX	±0.05	.XXX	ⓒ										
	ANGULAR ±1°						APPROVED BY		DATE		ⓐ ⓑ THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS														
C 0							PART NO.		DWG NO.		SHEET NO. 1/1			
												A		