
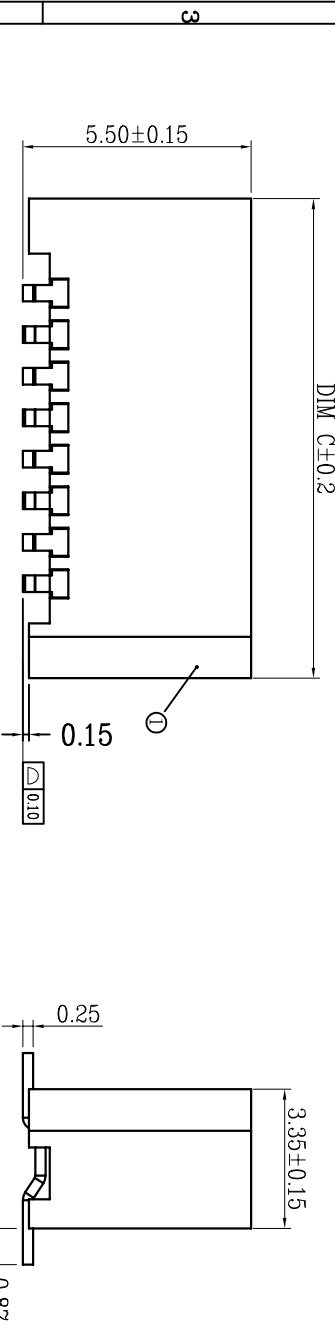
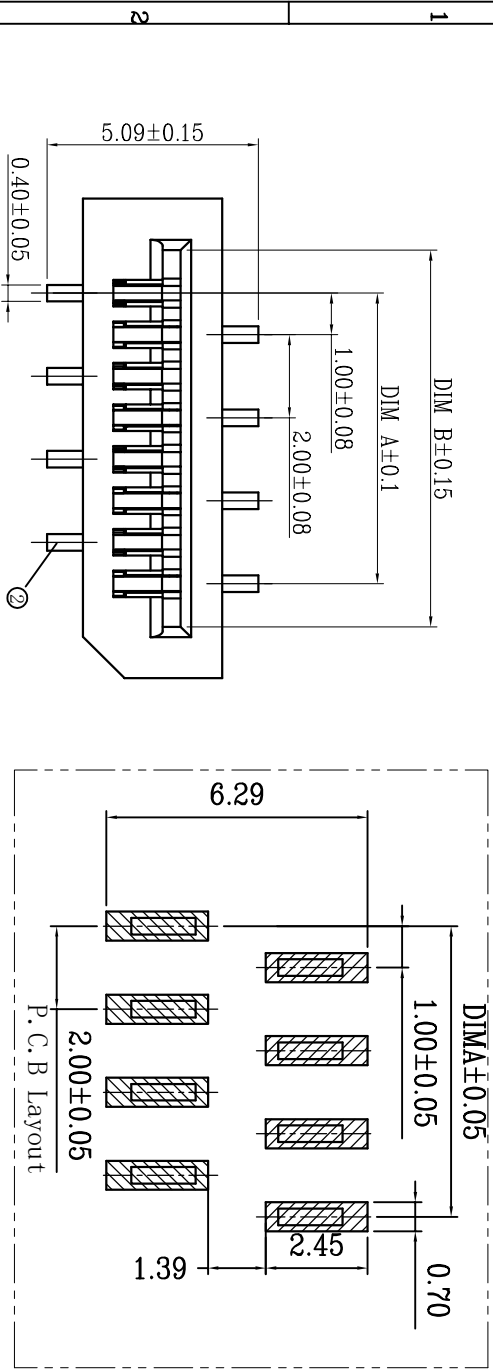


- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 2. 温度范围: -20° C~+85° C.
 3. 额定电压: 50V, AC(per pin)/DC等效.
 4. 额定电流: 0.5A.
 5. 接触电阻: ≤30mΩ.
 6. 绝缘电阻: ≥500MΩ.
 7. 耐压: 500V, AC/minute.
 8. 产品料号: 5001 - FHZ 10 55 - ** R1
- JM FPC CONNECTOR SERIES
PITCH: 1.0
HIGH: 5.5
ALTERNATE
PACKING: R: 卷; T: 管
PIN

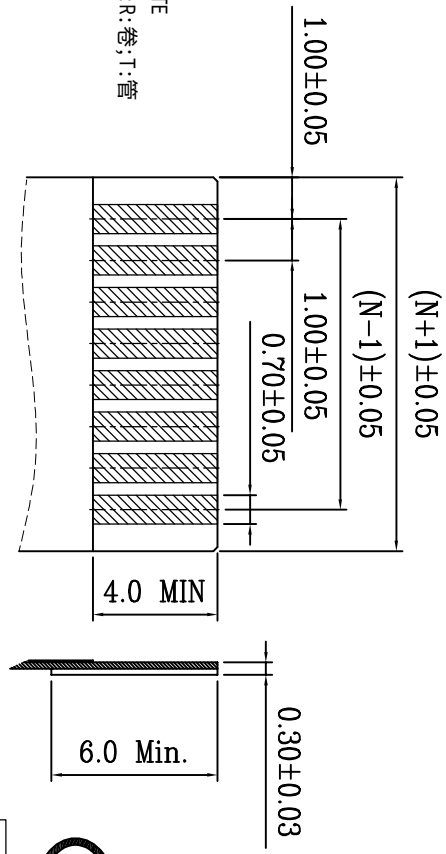

CKT	DIM A	DIM B	DIM C	CKT	DIM A	DIM B	DIM C
4	3.00	5.07	7.55	23	22.00	25.07	26.55
5	4.00	6.07	8.55	24	23.00	26.07	27.55
6	5.00	7.07	9.55	25	24.00	26.07	28.55
7	6.00	8.07	10.55	26	25.00	27.07	29.55
8	7.00	9.07	11.55	27	26.00	28.07	30.55
9	8.00	10.07	12.55	28	27.00	29.07	31.55
10	9.00	11.07	13.55	29	28.00	30.07	32.55
11	10.00	12.07	14.55	30	29.00	31.07	33.55
12	11.00	13.07	15.55	31	30.00	32.07	34.55
13	12.00	14.07	16.55	32	31.00	33.07	35.55
14	13.00	15.07	17.55	33	32.00	34.07	36.55
15	14.00	16.07	18.55	34	33.00	35.07	37.55
16	15.00	17.07	19.55	35	34.00	36.07	38.55
17	16.00	18.07	20.55	36	35.00	37.07	39.55
18	17.00	19.07	21.55	37	36.00	38.07	40.55
19	18.00	20.07	22.55	38	37.00	39.07	41.55
20	19.00	21.07	23.55	39	38.00	40.07	42.55
21	20.00	22.07	24.55	40	39.00	41.07	43.55
22	21.00	23.07	25.55				

深圳市文章济美科技有限公司

品名 (NAME)
1.0 Pitch 无盖立式单面接正脚位 (H=5.5)

料号 (DRAWING)
5001-FHZ1055-**-R1-00

一般公差 (TOLERANCE)
X ±.50 XX ±.10
X ±.20 XXX ±.05
ANGLES ±1°

比例 (SCALE)
1:1

单位 (UNITS)
mm

张数 (SHEET)
1 OF 1

审核 (APPD)
A4

尺寸 (SIZE)
A