
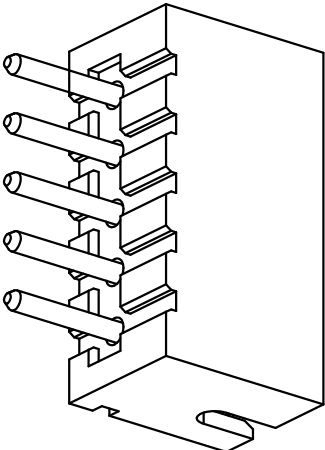

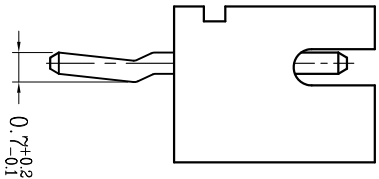
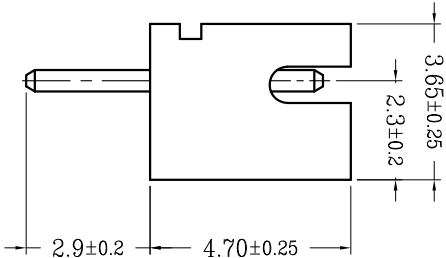
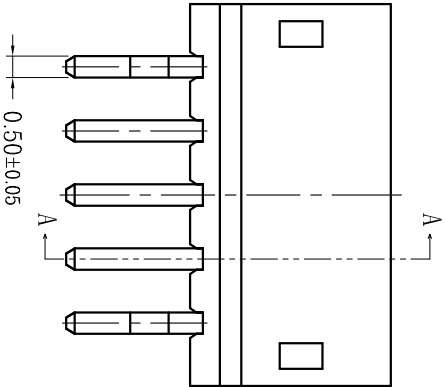


版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2019/07/20	①	ZHL.5直针WTB胶芯	PA66 UL94V-0 米色 白色

②	ZHL.5直针WTB端子	铜合金/表面镀锡
---	--------------	----------

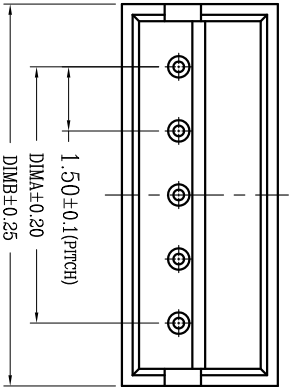

TYPE 1 (无K脚)

TYPE 2 (打K脚)


SECTION A-A

CKT	A	B	CKT	A	B
2	1.5	4.5	12	16.5	19.5
3	3.0	6.0	13	18.0	21.0
4	4.5	7.5	14	19.5	22.5
5	6.0	9.0	15	21.0	24.0
6	7.5	10.5	16	22.5	25.5
7	9.0	12.0	17	24.0	27.0
8	10.5	13.5	18	25.5	28.5
9	12.0	15.0	19	27.0	30.0
10	13.5	16.5	20	28.5	31.5
11	15.0	18.0			

技术指标 (Technical Index) :

1. 温度范围 (Temperature range) : -25° C~+85° C.
2. 额定电压 (Rated voltage) : 100V, AC.
3. 额定电流 (Rated current) : 1.0A AC, DC.
4. 接触电阻 (Contact resistance) : ≤20mΩ .
5. 绝缘电阻 (Insulation resistance) : ≥500MΩ.
6. 耐压值 (Withstanding voltage) : 500V AC/minute.
7. 产品料号 (Product material No.) :

5001 — ZH 0015 C — ** P 1
JM CONNECTOR SERIES
PITCH: 1.5
C: 直针
ALTERNATE
PACKING: P: 袋
PIN

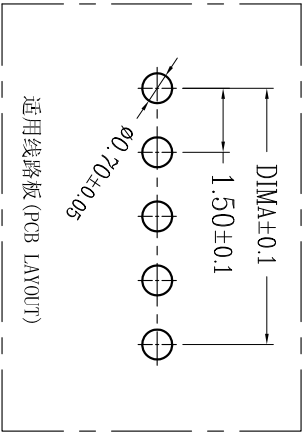

一般公差 (TOLERANCE)
X ±.50 XX ±.10
X ±.20 XXX ±.05
ANGLES ±1°

深圳市文章济美科技有限公司

品名 (TITLE)	料号 (DRAWING)	比例 (SCALE)	单位 (UNITS)	张数 (SHEET)	审核 (APPD)	制图 (DRW)	校对 (CHKD)
ZHL.5直针WTB	5001-ZH0015C-**-P1-00	1:1	mm	1	黄志明	Anlan	王涛