RoHS Compliant

结构图面

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
0	原始图档		JACK		150306

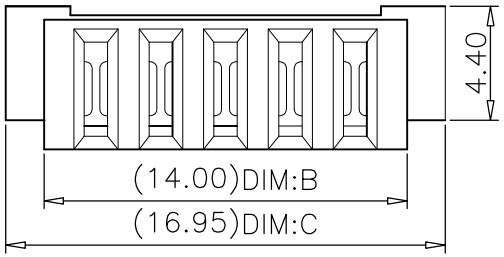

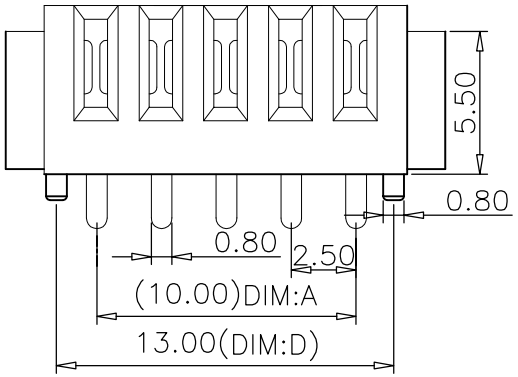

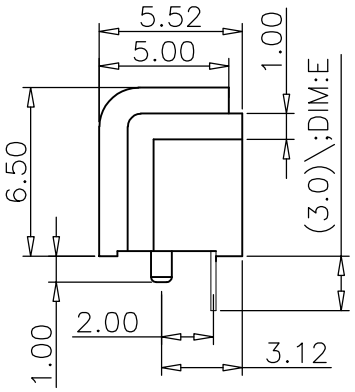

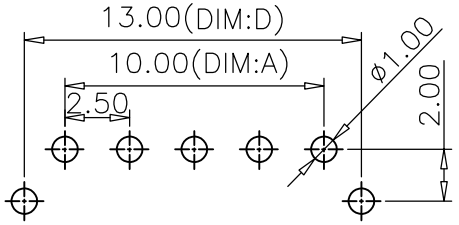

Recommended P.C.B Layout

Layout Tolerance=+/−0.05mm

Material
Insulator:Nylon 9T(UL94V−0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:−40°~105°

No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
02	2.50	6.50	9.45	5.50	2.1/3.0
03	5.00	9.00	11.95	8.00	2.1/3.0
04	7.50	11.50	14.45	10.50	2.1/3.0
05	10.00	14.00	16.95	13.00	2.1/3.0
06	12.50	16.50	19.45	15.50	2.1/3.0
07	15.00	19.00	21.95	18.00	2.1/3.0
08	17.50	21.50	24.45	20.50	2.1/3.0
09	20.00	24.00	26.95	23.00	2.1/3.0
10	22.50	26.50	29.45	25.50	2.1/3.0
11	25.00	29.00	31.95	28.00	2.1/3.0
12	27.50	31.50	34.45	30.50	2.1/3.0
13	30.00	24.00	36.95	33.00	2.1/3.0
14	32.50	36.50	39.45	32.50	2.1/3.0
15	35.00	39.00	41.95	35.00	2.1/3.0
16	37.50	41.50	44.45	37.50	2.1/3.0

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM		INCH
.X	±0.25	.X	
.XX	±0.15	.XX	
.XXX	±0.05	.XXX	

ANGULAR ±1°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE: 1:1 | NUMBER:
MATERAIL: | HRC:
DRAWN BY | DATE
CHECKED BY | DATE
APPROVED BY | DATE

深圳市文章济美科技有限公司

TITLE: Battery 2.5PH 180度中柱 母座

THIRD ANGLE PROJECTION | REVISE ON CAD ONLY

PART NO. | DWG NO. | SHEET NO. 1/1

Shenzhen Wenzhang Jimei Technology Co., Ltd. | A4