


RoHS
Compliant

结构图面






REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
	新版发行		JACK	Yang	250908

备注:

1. 额定电流: 15A (单PIN) ;
2. 额定电压: AC/DC 30V Max
3. 绝缘耐压: AC 1000V 1 MINUTE, 无损伤
4. 绝缘电阻: DC 500V 1 MINUTE, 1000M Ω Min
5. 操作温度: -40° to +85°
6. 塑胶材质: PA9T黑色/耐高温260° $\pm$ 5° ,
7. 五金材质: C2680 (T=0.8mm)/镀金1u”

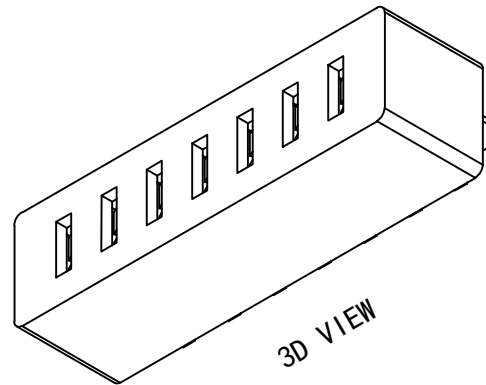

3D VIEW

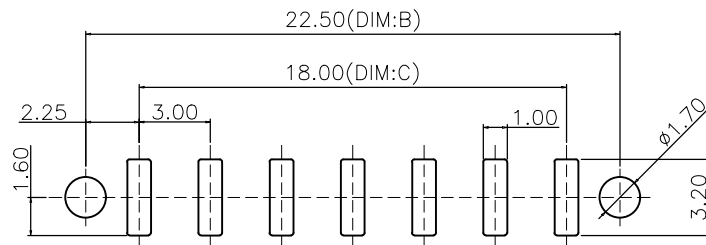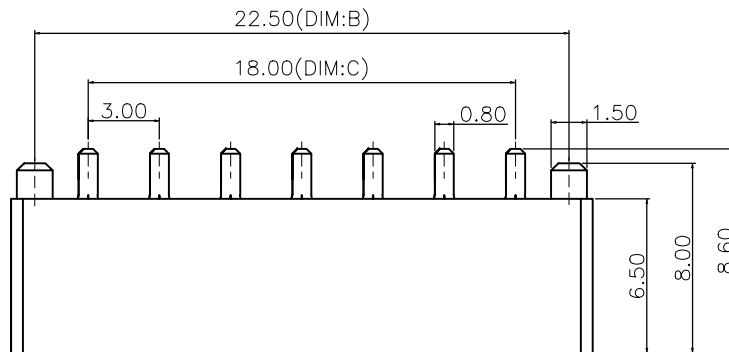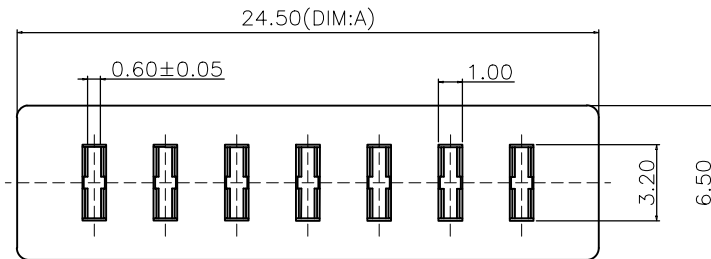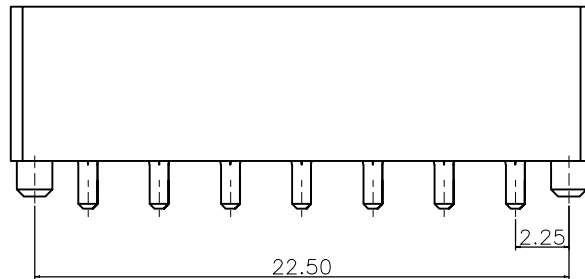

P. C. B LAYOUT
TOLERANCE: $\pm$ 0.05

PART NUMBER	P/N	DIM:A	DIM:B	DIM:C
JMEC02-30MD15A01	02PIN	9.50	7.50	3.00
JMEC03-30MD15A02	03PIN	12.50	10.50	6.00
JMEC04-30MD15A03	04PIN	15.50	13.50	9.00
JMEC05-30MD15A04	05PIN	18.50	16.50	12.00
JMEC06-30MD15A05	06PIN	21.50	19.50	15.00
JMEC07-30MD15A06	07PIN	24.50	22.50	18.00
JMEC08-30MD15A07	08PIN	27.50	25.50	21.00
JMEC09-30MD15A08	09PIN	30.50	28.50	24.00
JMEC10-30MD15A09	10PIN	33.50	31.50	27.00
JMEC11-30MD15A10	11PIN	36.50	34.50	30.00
JMEC12-30MD15A11	12PIN	39.50	37.50	33.00

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE: 1:1	NUMBER:	深圳市文章济美科技有限公司		
		MM	INCH	MATERIAL:	HRC:			
	. X	$\pm$ 0.25	. X	⑈ ----	DRAWN BY	DATE	TITLE: 3.0PH 180度DIP 6.5H 母座/大电流	
	. XX	$\pm$ 0.15	. XX	⑈ ----	CHECKED BY	DATE		
	. XXX	$\pm$ 0.05	. XXX	⑈ ----	APPROVED BY	DATE	THIRD ANGLE PROJECTION	
	ANGULAR $\pm$ 1°			REVISION ON CAD ONLY			PART NO.	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DWG NO.			SHEET NO. 1/1	
							A4	